BATTERY-POWERED BLIND RIVETER

For the cordless processing of blind rivets of dia. 2.4 to 5.0 mm. Complete with carrying case.

ANG 14
Art. No. 0700 915 5

Operation with NiCd- and Li-ion batteries possible.

- Li-ion battery with 1.3 Ah and 2.6 Ah battery capacity.
  Low weight, high performance and no memory effect.
  Longer runtime per battery charge.
- Ergonomic handle and compensated center of gravity for fatigue-free working.
- The immediate reset to the starting position after the riveting procedure saves energy and increases the number of processing sequences.
- Torn-off mandrels can be collected in a container.
- With mount for balancer.
- Front shell, approx. L = 55 mm, dia. = 25 mm.
- 3-year warranty.
  During this period, all manufacturing and material defects will be repaired free of charge.

Scope of delivery		
Designation	**Art. No.**	**P.Qty.**
ANG 14 Battery-Operated Blind Riveter	**–**	1
G 14 Battery, 14.4 V, 1.3 Ah	**0700 915 13**	1
LG 14 Charger	**0700 915 220**	1
Mouthpiece, 3.0/3.2 Al, Cu, steel, stainless steel/4.0 Al, Cu	**0949 20 3**	1
Mouthpiece, 4.0 steel	**0949 20 4**	1
Mouthpiece, 4.0 stainless steel, 4.8/5.0/Al, Cu	**0949 20 5**	1
Mouthpiece, 4.8/5.0 steel	**0949 20 6**	1
Wrench for mouthpieces, 12 mm	**0949 20 9**	1
Collecting Container for mandrels	**0949 20 8**	1

Technical Data	
Battery	Li-Ion 14.4 V
Weight	2.0 kg
Charging duration of G 14.4 V, 1.3 Ah	50 min/0 °C to +40 °C
Charging duration of G 14.4 V, 2.6 Ah	100 min/0 °C to +40 °C
Charging voltage	14.4 V
Total stroke	20 mm
Tractive force	10,000 N

Retaining Mouthpieces			
for rivet dia.	**Rivet material**	**Art. No.**	**P.Qty.**
2.4 3.2	Al Al, Cu	**0949 20 12**	1
3/3.2 3/3.2 4	Al, Cu stainless steel Al	**0949 20 13**	1
4	Steel	**0949 20 14**	1
4 4.8/5.0	Stainless steel Al, Cu	**0949 20 15**	1
4.8/5.0	Steel	**0949 20 16**	1
5	Stainless steel	**0949 20 17**	1

Suitable Accessories		
Designation	**Art. No.**	**P.Qty.**
G 14 Battery, 14.4 V, 2.6 Ah	**0700 915 26**	1

Available individually		
Designation	**Art. No.**	**P.Qty.**
Replacement Clamping Jaws, 3-piece	**0949 20 10**	1
Mouthpiece 5.0 stainless steel	**0949 20 7**	1
Mouthpiece 2.4 Al/3.2 Al, Cu	**0949 20 11**	1

Front shell in mm:

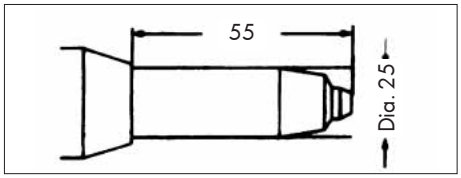

Available in the fleet management system ORSY®fleet.

MWF - 03/13 - 01279 - ©